

CE-9500B

WALL MOUNT INSTALLATION GUIDE

NOTE: This wall mount is shipped with all proper installation hardware and components. Make sure that none of these parts are missing and/or damaged before beginning installation. If there are parts missing and/or damaged, please stop the installation and contact Clinton Electronics at 1-800-549-6393.




CAUTION: This mount is intended for use only with the maximum weights indicated. Use with products heavier than the maximum weights indicated may result in instability causing possible injury. This product is intended to mount to wood studs, concrete or brick wall.

⚠️ Maximum Load Capacity: 154 lbs / 70 kgs ⚠️

Included Items		C: 5/16" x 3" Lag Bolt 4pcs	G: Bubble Level 1pc	K: M5x25 Screw 6pcs	Q: M8x20 Screw 6pcs
<p>A: Wall Plate 1pc</p> <p>B: Mounting Brackets 2pcs</p>	D: 5/16" Washer 4pcs	H: M4x16 Screw 6pcs	M: M6x20 Screw 6pcs	L: M5 Washer 6pcs	
	E: 1/4" x 2" Wall Anchor 4pcs	I: M4x25 Screw 6pcs	N: M6x55 Screw 6pcs	O: M6 Washer 6pcs	
	F: Spacer 4pcs	J: M5x16 Screw 6pcs	P: M8x20 Screw 6pcs	R: M8 Washer 6pcs	


Option 1: Mounting to Wood

With a stud finder, locate two 16" or 24" stud centers behind the wall. Once found, make a pencil marking on the center of the wood studs. Level the plate with the bubble level and drill four 1/4" pilot holes. Secure the wall plate to the wall with the lag bolts & washers.

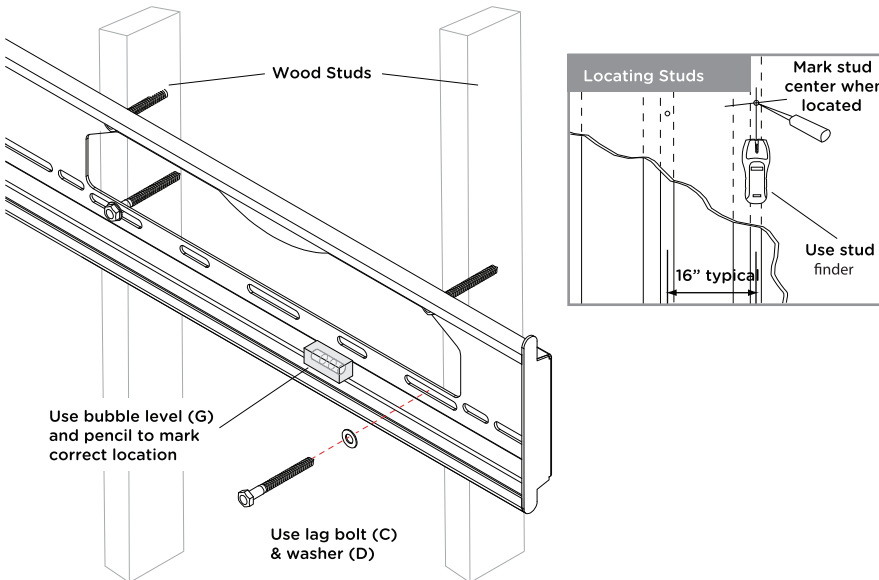


Option 2: Weight Distribution Mount (with Large Adapter Plate) for concrete/brick

Hold the wall plate in the desired position, and level it with the supplied bubble level. Then mark the holes with a pencil. With a 5/16" masonry drill bit, drill holes 1.5" deep into the mounting surface. (You can measure the depth of your drill by wrapping a piece of tape around the drill bit). Clean the dust from the holes and then push the wall anchor expansion screw into the holes until the head of the bolt is flush against the wall plate. Finger tighten, then use a wrench to fully secure.

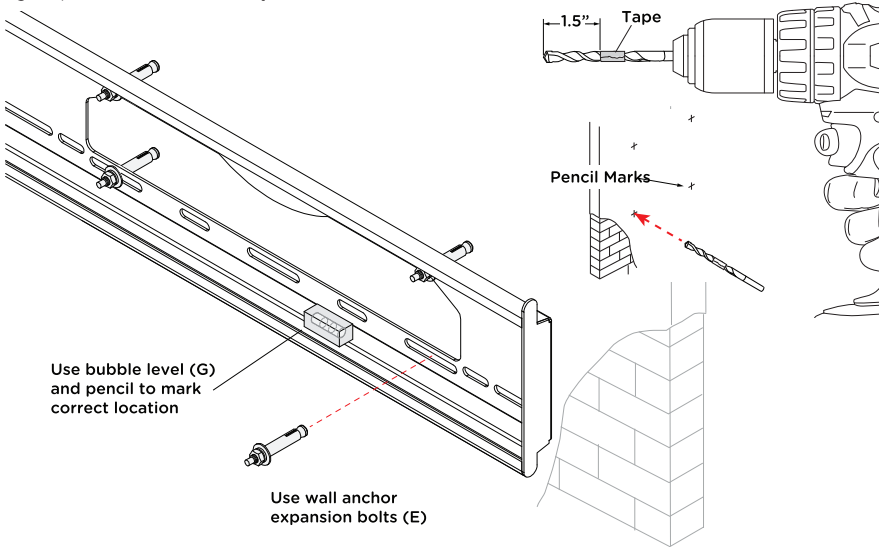


1. Attach Mounting Brackets

Use the appropriate VESA mounting screws and washers to attach the Mounting Brackets (B) to the display. Use Spacers (F) if necessary.

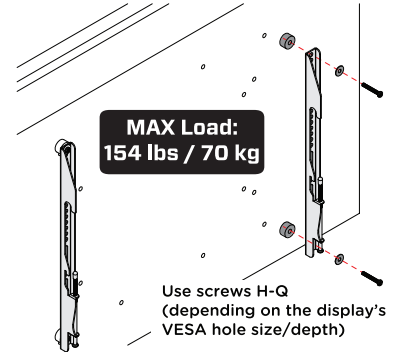

2. Mount Display to Wall Plate

Lower the display onto the wall plate so the hooks on the mounting bracket catch the wall plate.

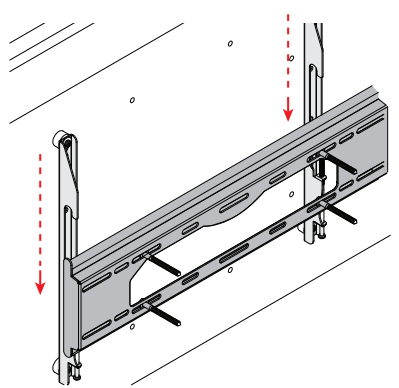

3. Secure Display to Wall Plate

Tighten the screw on the bottom of the mounting brackets until they are firmly seated against the wall plate.

