



CE-M10S 10" Public View Monitor (White)



INFO:

- 1024 x 600 Resolution
- 16:9 Aspect Ratio
- "Recording In Progress," "Welcome" Text Overlay or Anti-Theft Logo
- Flashing LED
- Acrylic Front
- 1 BNC Output
- 1,000 TVL Camera (S5 DSP)
- 2.5mm Fixed Lens
- Video Motion Detection
- Built-in SD Card Player (4GB Card Included)
- LCD & Camera Controls Behind Door
- DC24V (Power Supply Sold Separately)
- VOV (Video On Video)
- Switch Mode & Alarm Trigger Mode
- Sleep Timer
- UL Listed

DIMENSIONS:

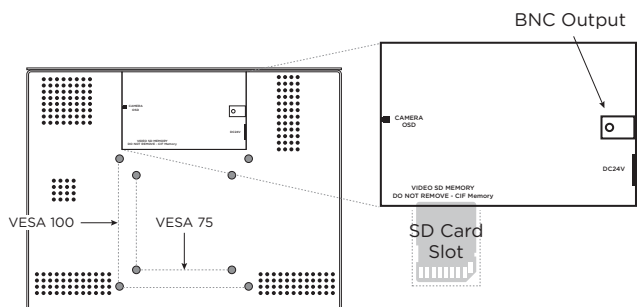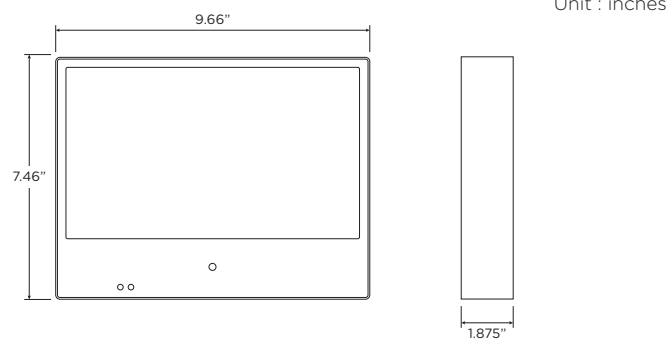

SPECIFICATIONS:

Monitor	
Display	10" TFT LCD
Resolution	1280 x 800
Aspect Ratio	16:9
Display Colors	16M
Brightness	350 nit
Contrast Ratio	800:1
Viewing Angle (H x V)	85° x 85° x 85° x 85°
Response Time	20ms
Mounting	VESA 75 & 100
In / Out Impedance	75Ω /Auto Terminating Output
Video Inputs / Outputs	1 BNC Output
Power Consumption	12 Watts (DC24V)
Power Requirement	DC24V
Operating Temperature	32°F - 104°F / 0°C - 40°C
Dimensions (W x H x D)	9.66" x 7.46" x 1.4" 245.364mm x 189.484mm x 35.56mm
Weight	3.4 lbs / 1.542kg

Camera	
Image Sensor	1/3" Mega SONY Exmor
Resolution	1,000 TVL
Effective Pixels	1305 (H) x 1049 (V), 1.37 Mega Pixels
Scanning System	2:1 Interlace
S/N Ratio	52dB
Sync System	Internal
Minimum Illumination	0.00001 Lux (Sens-Up x32)
Shutter Speed	1/60 - 1/60,000 sec.
Lens	2.5mm Fixed Board Lens
Video Output	1.0 Vp-p, 75Ω
Frequency	Horizontal: 15.734 KHz, Vertical: 59.94 Hz

Camera OSD (K1)	
Lens	DC, Manual
Exposure	Brightness, Shutter, Sens-Up, AGC
White Balance	ATW, AWB, AWC->Set, Manual
Backlight	HLC, BLC, WDR
DNR	Off, Low / Middle / High
Day & Night	Auto, Color, B/W, Extern
Image	Sharpness, Gamma, Pedestal, Color Gain, Mirror, Flip
System	COM., View Angle, CVBS, Reset
Special	D-Zoom, D-WDR, Defog, Shading, Privacy, Intelligent: Motion / Alarm / Quick Zoom
Exit	Save, Not Save, Reset

Recommended Power Supply	
CE-PS200	120W Single Monitor Power Supply (24VDC)
CE-S320-B	320W Multiple Monitor Power Supply (24VDC)
CE-600-24-B	600W Multiple Monitor Power Supply (24VDC)

CERTIFICATIONS:

