


CE-HD2CAT5-R HD-SDI to CAT5e Repeater

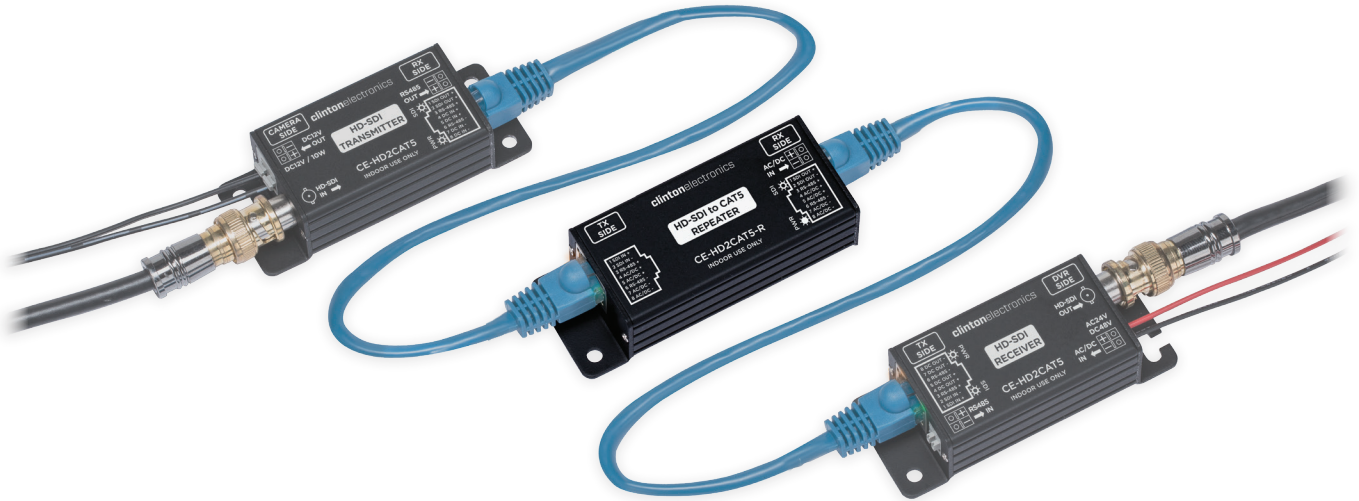

INFO:

The CE-HD2CAT5-R Repeater enables an HD-SDI signal, power, and RS-485 data to be repeated an additional 400' when using the CE-HD2CAT5 Transmitter and Receiver.

- Repeats HD-SDI transmission over CAT5e up to 400'
- SMPTE 292M (1.5G)
- Powered from Receiver via CAT5 cable (PoE)

**Requires CE-HD2CAT5 Kit (Sold Separately)*

**Cable Shown Not Included*

SPECIFICATIONS:

Video IN / OUT	HD-SDI
Power Consumption	Under 100mA
Power IN	PoE: DC12V Input / DC12V Output Optional AC24V Input / DC12V Output (Max. 5W)
Bandwidth	1.485 Gbps
Max. Distance	800' over CAT5e (400' Input x 400' Output)
Operating Temperature	32°F - 104°F / 0°C - 40°C
Humidity	10% - 90% RH (Non-Condensing)
Dimensions	3.4" (W.) x 1.3" (H) x 0.85" (D) 86.5mm (W.) x 33mm (H) x 21.5 (D)
Weight	0.22 lbs / 0.09 kg

CONNECTION DIAGRAM:

