

CE-HD04M HD-SDI Motion Detection Multi-Way Mux




INFO:

- 4 HD-SDI Input / 1 HD-SDI & 1 HDMI output
- Motion Detection switches video signal
- Sequencable (Auto Sequence)
- Full Screen, Split Screen & Quad Screen
- Adjustable resolution output for HDMI/HD-SDI
- Supports RS-485
- DC12V

SPECIFICATIONS:

VIDEO	HD-SDI Input (4ch)	1920x1080p: (23.98/24/25/29.97/30/50/59.94/60) 1920x1080i: (50/59.94/60) 1280x720p: (25/30/50/59.94/60)
	HD-SDI Output	1920x1080p: (23.98/24/25/29.97/30/50/59.94/60) 1920x1080i: (50/59.94/60) 1280x720p: (25/30/50/59.94/60)
	HDMI Output	1280x720p(50/59.94/60) 1920x1080i(50/59.94/60) 1920x1080p(23.98/24/25/29.97/30/50/59.94/60)
SPLIT MODE		Full, Dual (1ch/2ch), Quad
OSD (Joystick control)		Display Mode (Sequence/Full/Dual/Quad) Sequence Time Border Line (On/Off) Ch Title (On/Off)
SYSTEM ID		1-255
BAUDRATE		2400, 4800, 9600, 19200
POWER REQUIREMENT		DC 12V / 1A
POWER CONSUMPTION		DC 12V / 0.45A
OPERATING TEMPERATURE		32°F - 104°F / 0°C - 40°C
HUMIDITY		5% - 85% RH (Non-Condensing)
MATERIALS		Aluminum Housing
WEIGHT		0.67lb / 305g
DIMENSIONS		5.77" (W) x 4.01" (H) x 1.26" (D) 146.6mm(W) x 102mm(H) x 32.2mm(D)

DIMENSIONS:

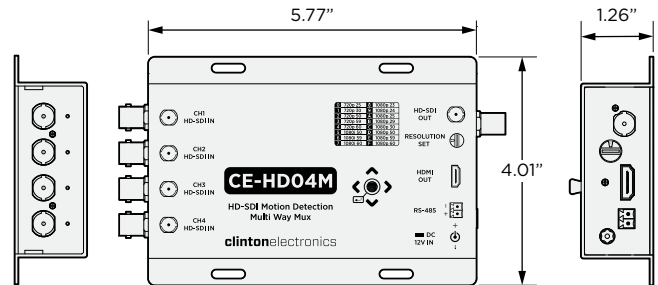

CONNECTION DIAGRAM:

