

## CE-HDMI2EX

HDMI to EX-SDI 2.0 Converter




VIDEO INPUT	
Channels	1ch HDMI (HDMI 1.3, DVI Compliant)
Resolution	Full HD 1080p @ 25 / 30 / 50 / 60fps Full HD 1080i @ 50 / 60fps HD 720p @ 50 / 60 fps
VIDEO OUTPUT	
Output	1ch EX-SDI 2.0, EX-SDI, HD-SDI (output selectable) 1ch HD-SDI
Loop-Out	1ch HDMI
HDMI Output Resolution *adjustable	Full HD 1080p @ 25 / 30 / 50 / 60fps Full HD 1080i @ 50 / 60fps HD 720p @ 50 / 60 fps
GENERAL	
Power Requirement	DC12V / 1A
Power Consumption	0.25A (250mA) ± 10%
Operating Temperature	32°F - 122°F / 0°C - 50°C
Operating Humidity	0-80% RH
Dimensions (L x W x H)	4.125" x 3.66" x 1.37" / 104.7mm x 93mm x 35mm
Weight	0.45 lbs / 0.2 kg

### Key Features:

- Converts an HDMI Signal into an EX-SDI 2.0 signal
- 1ch HDMI Input
- 1ch HDMI Loop-Out
- 1ch EX-SDI 2.0 / EX-SDI / HD-SDI Output
- 1ch HD-SDI Output
- Supports RS-485 (Half Duplex) Input
- Adjustable SDI output signal type (EX-SDI 2.0, EX-SDI or HD-SDI)
- DC12V (Power Supply Sold Separately)
- Mountable Aluminum Housing

### Dimensions:

Unit : Inches

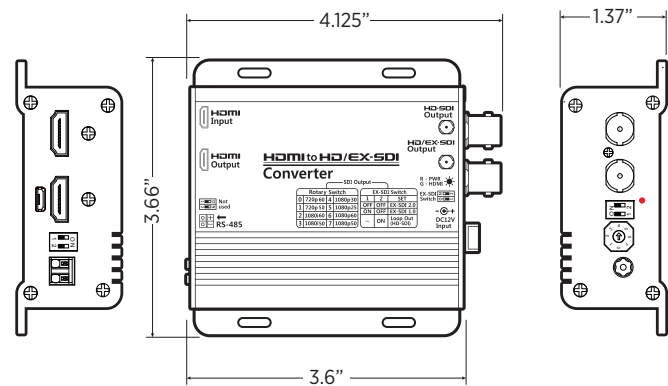

### Connection Diagram (Example):

