

CE-EX8-DKIT

8 Channel EX-SDI 2.0 Indoor Mini Dome Kit




KIT FEATURES:

- Full HD 1080p cameras & DVR with recording speeds up to 30fps
- EX-SDI 2.0 cameras & DVR allow for installations up to 1,400 ft using RG59 coaxial cable (sold separately)
- Compact mini indoor domes measure just 2.1" tall
- Easy to adjust Angle-of-view with 3.6mm fixed lens
- Pre-installed 1 TB HDD
- Easy to use DVR interface via USB mouse or remote control
- DVR is pre-configured to record right out of the box
- Adjustable recording rates based on motion detection and/or time
- Remotely access the DVR with free PC software and/or CEC phone app

KIT INCLUDES:

- 8 x CE-D10HDL: EX-SDI Mini indoor Dome Cameras
- 1 x CE-EX8: 8 Channel EX Series DVR with 1 TB HDD
- 1 x CE-DC12V8: 8 Channel DC12V UL Listed Power Supply

DIMENSIONS:

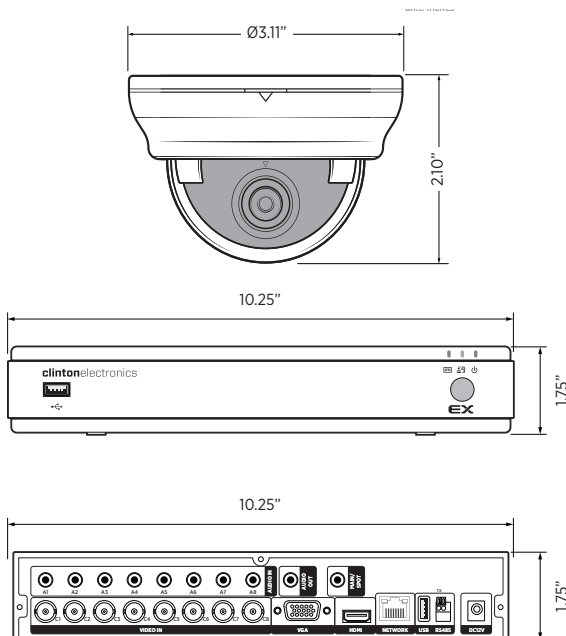

CAMERA	
Image Sensor	1/2.9" SONY 2.19 Megapixel CMOS
Resolution	Full HD 1080p
Frame Rate	1080p_30 / 720p_30
Minimum Illumination	0.1 Lux
Lens	3.6mm (f2.0) Fixed Lens
Filed of View	75° (Horizontal)
Video Output	1 EX-SDI 2.0 / HD-SDI Output, 1 Analog (1,000 TVL) Output
Power Consumption	100mA ±10% max. (DC12V)
Power Requirement	DC12V
Operating Temperature	32°F - 113°F / 0°C - 45°C
Operating Humidity	90% RH Max.
Weather Rating	N/A - Indoor Use Only
IR LEDs	N/A
Heaters/Fan	N/A
Materials	Plastic Case w/Polycarbonate Dome
Dimensions (straight)	3.1" (Dia.) x 2.1" (H) / 79mm (Dia.) x 53.4mm (H)
Weight	0.25 lb / 0.11 kg

DVR	
Camera Inputs	8CH [BNC] Auto Sensing: EX-SDI 2.0, EX-SDI and/or HD-SDI
Recording Speed	120 FPS Global (30 FPS per Channel)
Recording Resolution	1080p/720p (EX-SDI/HD-SDI) by ehac channel
Recording Quality	Highest / High / Normal / Low
Standard HDD	1 TB
Back-Up	USB, or PC via SMS Remote Software
Video Outputs (MAIN)	1 HDMI, 1 VGA, 1 RCA
Video Output (SPOT)	RCA Main can be configured as SPOT (Analog)
Multi Screen Display	1 / 4 / 7 / 9
Audio In / Out	8RCA In/1RCA Out
Alarm In / Out	N/A
USB	2 USB Ports (1 Front / 1 Rear)
PTZ / Keyboard	1 RS485 (TX +/-)
eSATA	N/A
Ethernet	1 RJ-45 100/1,000 Mbps Ethernet
Search Speed	x1, x2, x4, x8, x16
Search Modes	Quick, Calendar, Event, Overlapped List, Panorma, Museum
Operating System	Embedded Linux
Video Codec	H.264 Enhanced Compression Method
Audio Codec	ADPCM
File Format	Proprietary DVR Format
User Control	Remote Control, USB Mouse
PTZ Support	Control Through USB Mouse / Multiple Protocols Recognized: Clinton, Pelco, Panasonic, Kalatel, etc...
Network Bandwidth	8 Mbps - 50kbps, SMS 1Mbps min.
Language	English, Korean, Japanese, Chinese, Russian, French, German, Italian, Taiwan, Spanish, Portuguese
Operation Temp / Humidity	32°F - 104°F / 20% RH - 80% RH
Power Requirement	DC12V (DC12V/3A Power Supply included)
Power Consumption	850mA Max ± 10%
Dimensions (W x D x H)	10.25" x 9.375" x 1.75" / 260mm x 238mm x 44mm
Weight (no HDD)	2.6 lbs / 1.17 Kg

POWER SUPPLY (Camera)	
Input Voltage	100-240VAC (50/60Hz)
Output Voltage	DC12V (Adjustable, max DC13.2V)
Total Amps	6 Amps
Total Outputs	8 Channels (screw terminals)
Certifications	UL Listed, FCC, CE
Dimensions	8" x 10.5" x 3.5" / 203.2mm x 266.7mm x 88.9mm
Weight	4.95 lbs / 2.25 kg