

CE-M24A-B

24" IP Public View Monitor (Black)

Image for Color Reference Only
Actual Product May Vary



KEY FEATURES:

- Built-In 2.8mm (f1.8) Fixed Lens IP Camera
- 1/2.8" 2 MP SONY CMOS Sensor
- 16:9 Aspect Ratio / 1920 x 1080 Screen Resolution
- 300 nit Brightness / 3000:1 Contrast Ratio
- Steel Cabinet with Acrylic Front
- "RECORDING IN PROGRESS" or "WELCOME" Text Overlay in English or Spanish
- H.264 & Motion JPEG Compression
- ONVIF 2.3 & Profile S Compliant
- Flashing LED Light
- 1 RJ45 Ethernet Port
- 1 BNC Output (Analog)
- VESA 75 & 100
- DC24V (Power Supply Sold Separately)
- UL Listed

MONITOR	
Display	24" LED Backlight LCD
Resolution	1920 x 1080
Aspect Ratio	16:9
Display Colors	16.7M (8 BIT)
Brightness	300 nit
Contrast Ratio	3000:1
Viewing Angle	89° x 89° x 89° x 89°
Response Time	6.5ms
Mounting	VESA 75 & 100

CAMERA	
Image Sensor	1/2.8" 2 Megapixel SONY CMOS
Lens	2.8mm (f1.8) Fixed Lens
Angle of View	105° Horizontal


VIDEO	
Video Compression	H.264 & Motion JPEG Compression
Resolution	Full HD 1080p (1920x1080)
Frame Rate	30 FPS

SYSTEM REQUIREMENTS	
Minimum Operating System Requirement	Pentium 4 2.8GHz (or equivalent AMD) 256MB RAM graphic cards (or equivalent on-board graphic cards) 1G RAM Window 2000, 2003, XP, Vista or Windows 7 Mac OS Leopard 10.5 or later

GENERAL	
Connectors	1 - 1 BNC (Analog) Video Output 1 - RJ45 Ethernet 10/ 100 Base-T
Power Requirement	DC24V, 2.0A
Power Consumption	25 Watts
Operating Temperature	32°F - 122°F / -0°C - 50°C
Dimensions (W x H x D)	22.13" x 15.25" x 3.25" 562.102mm x 387.35mm x 82.55mm
Weight	13.55lbs / 6.15kgs

RECOMMENDED POWER SUPPLY	
CE-PS200	120W Single Monitor Power Supply (24VDC)
CE-S320-B	320W Multiple Monitor Power Supply (24VDC)
CE-600-24-B	600W Multiple Monitor Power Supply (24VDC)

DIMENSIONS:

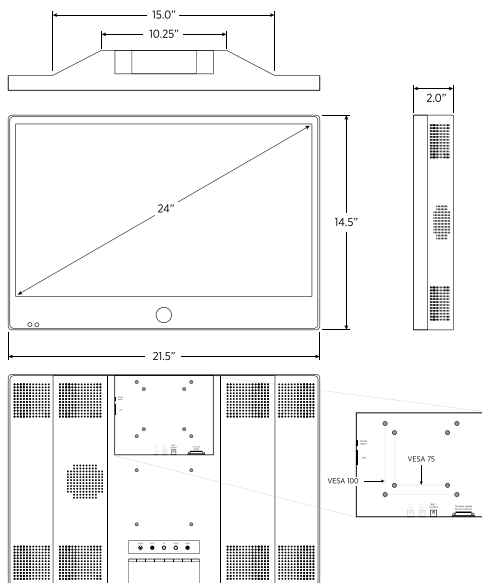

CERTIFICATIONS:

