

## CE-P43NC-SR-B

43" Sunlight-Readable Connect LCD (Black)



### KEY FEATURES:

- 43" Portrait Mode Digital Signage Monitor
- 1080 x 1920 Resolution / 16:9 Aspect Ratio
- 1500 nit Brightness / 4000:1 Contrast Ratio
- Screen content and scheduling is easily customized with included cloud-based Clinton Connect software
- Ads are updated via networked connection (Wifi or Ethernet)
- Built-in WiFi
- Steel Bezel
- 2 Alarm Inputs (terminal block)
- VESA 100 (M4), 200 (M6), 200 x 400 (M6)
- DC24V (power supply included)
- UL Listed

*NOTE: No camera, no video output*


MONITOR	
Display	42.5" AMVA3 LED Backlight LCD
Resolution	1920 x 1080
Aspect Ratio	16:9
Display Colors	16.7M (8 BIT)
Brightness	1500 nit
Contrast Ratio	4000:1
Viewing Angle	178° / 178°
Response Time	8ms

GENERAL	
Video Outputs	n/a
Audio	n/a
Alarm Input	1 Terminal Block Alarm Input (Alarm 1 / Alarm 2)
Network	1 RJ45 Ethernet Port Built-In Wifi (2.4GHz & 5GHz dual-band AC)
Mounting	VESA 100 (M4), 200 (M6), 200 x 400 (M6)
Material	Steel Bezel
Power Consumption	6.5A / 156 Watts
Power Requirement	DC24V - (Includes 9.16A / 220W UL Listed Power Supply)
Operating Temperature	32°F - 104°F / 0°C - 40°C
Dimensions (W x H x D)	22.24" x 38.84" x 2.23" / 564.9mm x 986.5mm x 56.6mm
Weight	47.5 lbs / 21.54 kg

CLINTON CONNECT - Software	
Supported Web Browsers	Chrome, Safari, Edge
Advertising Components	Text Ticker, Images, Video, Camera Feed, Slideshow
Image Format	JPG, PNG, BMP
Video Format	MP4, MOV, AVI
Media Storage	100 GB Total— Monthly upload limits

RECOMMENDED POWER SUPPLY	
CE-S320-B	320W Multiple Monitor Power Supply (24VDC)
CE-600-24-B	600W Multiple Monitor Power Supply (24VDC)

### DIMENSIONS:

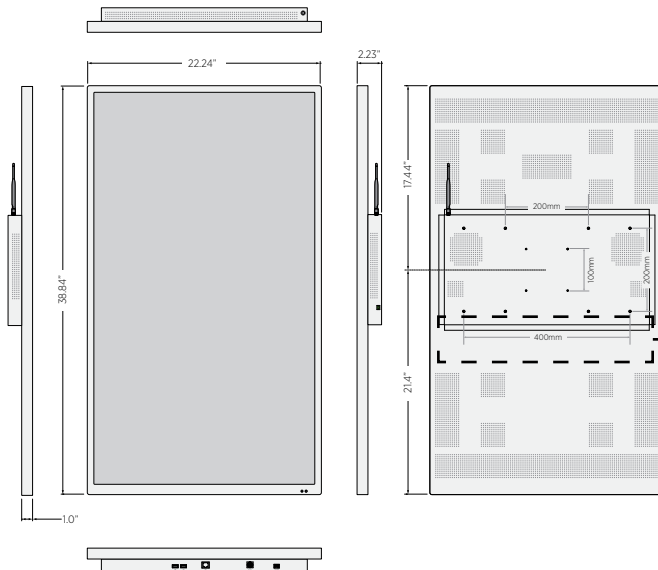

### CONNECTIONS:



### CERTIFICATIONS:

