

CE-P10A-B

10" IP Connect PVM (Black)



KEY FEATURES:

- 10" Portrait Mode Digital Signage PVM
- 16:10 Aspect Ratio / 800 x 1280 Resolution
- 350 nit Brightness / 800:1 Contrast Ratio
- Screen content and scheduling is easily customized with included cloud-based Clinton Connect software
- Ads are updated via networked connection (Wifi or Ethernet)
- Built-In AXIS® M3045 IP Camera w/ 2.8mm (f2.0) Fixed Lens
- Built-in WiFi
- Built-In Speakers
- Steel Bezel with Acrylic Front
- Video, Power & Network connections are secured behind cover plate
- 1 Button Triggered Alarm, 1 Alarm Input (terminal block)
- VESA 75 & 100
- DC24V (power supply sold separately)
- UL Listed

MONITOR	
Display	10" TFT LCD - Portrait Mode
Resolution	800 x 1280
Aspect Ratio	16:10
Display Colors	16M
Brightness	350 nit
Contrast Ratio	800:1
Viewing Angle (H x V)	170° x 170°
Response Time	25ms


CAMERA	
Image Sensor	1/3" Progressive Scan RGB CMOS
Lens	2.8mm (f2.0) Lens
Field of View	106° (Horizontal)
Minimum Illumination	0.25 Lux
Shutter Speed	1/32500 - 1/5 sec.

GENERAL	
Video Outputs	1 RJ45 Ethernet Port - Camera Feed Only
Alarm Input	1 Terminal Block Alarm Input 1 Button (built-in to front bezel)
Network	1 RJ45 Ethernet Port Built-In Wifi (2.4GHz)
Mounting	VESA 75x75, 100x100
Material	Steel Bezel w/ Acrylic Front
Power Consumption	19.2 Watts
Power Requirement	24VDC, 0.8A
Operating Temperature	32°F - 104°F / 0°C - 40°C
Dimensions (W x H x D)	9.375" x 7.6" x 1.875" 238.125mm x 193mm x 47.625mm
Weight	3.5 lbs / 1.58 kg

CLINTON CONNECT - Software	
Supported Web Browsers	Chrome, Safari, Edge
Advertising Components	Text Ticker, Images, Video, Camera Feed, Slideshow
Image Format	JPG, PNG, BMP
Video Format	MP4, MOV, AVI
Media Storage	100 GB Total— Monthly upload limits

RECOMMENDED POWER SUPPLY	
CE-PS200	120W Single Monitor Power Supply (24VDC)
CE-S320-B	320W Multiple Monitor Power Supply (24VDC)
CE-600-24-B	600W Multiple Monitor Power Supply (24VDC)

DIMENSIONS:

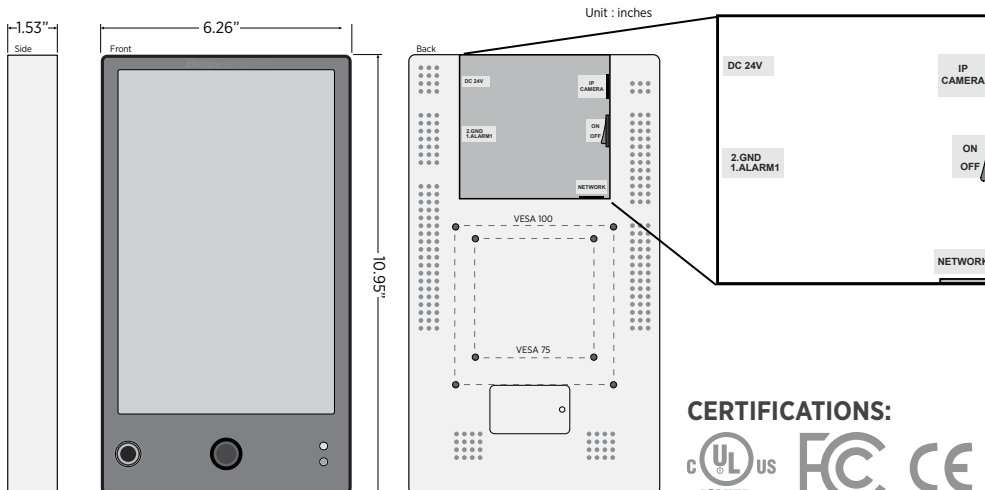

CERTIFICATIONS:

