


## CE-P13NC-B

13" Connect LCD (Black)

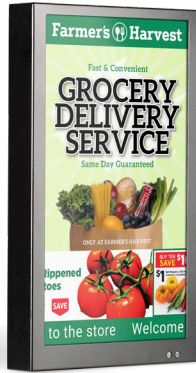

### KEY FEATURES:

- 13.3" Portrait Mode Digital Signage PVM
- 1080 x 1920 Resolution / 16:9 Aspect Ratio
- 800 nit Brightness / 800:1 Contrast Ratio
- Screen content and scheduling is easily customized with included cloud-based Clinton Connect software
- Ads are updated via networked connection (Wifi or Ethernet)
- Built-in WiFi
- Built-In Speakers
- Steel Bezel
- Power & Network connections are secured behind cover plate
- 2 Alarm Inputs (terminal block)
- VESA 75 & 100
- DC24V (power supply sold separately)
- UL Listed

*NOTE: No camera, no video output*


MONITOR	
Display	13.3" LED Backlight LCD (AHVA)
Resolution	1920 x 1080
Aspect Ratio	16:9
Display Colors	16.7M (8 BIT)
Brightness	800 nit
Contrast Ratio	800:1
Viewing Angle	89° / 89°
Response Time	25ms

GENERAL	
Video Outputs	n/a
Audio	Built-in Speakers
Alarm Input	1 Terminal Block Alarm Input (Alarm 1 / Alarm 2)
Network	1 RJ45 Ethernet Port Built-In Wifi (2.4GHz)
Mounting	VESA 75 & 100 (M4)
Material	Steel Bezel
Power Consumption	1A / 24 Watts
Power Requirement	24VDC
Operating Temperature	32°F - 104°F / 0°C - 40°C
Dimensions (W x H x D)	7.68" x 12.89" x 1.43" / 195.07mm x 327.4mm x 36.32mm
Weight	4.55 lbs / 2.06 kg


CLINTON CONNECT - Software	
Supported Web Browsers	Chrome, Safari, Edge
Advertising Components	Text Ticker, Images, Video, Camera Feed, Slideshow
Image Format	JPG, PNG, BMP
Video Format	MP4, MOV, AVI
Media Storage	100 GB Total— Monthly upload limits

RECOMMENDED POWER SUPPLY	
CE-PS24	32W-1.5A Single Monitor Power Supply (24VDC)
CE-PS90	90W-3.75A Single Monitor Power Supply (24VDC)
CE-PS200	120W-5A Single Monitor Power Supply (24VDC)
CE-S320-B	320W-12.5A Multiple Monitor Power Supply (24VDC)
CE-600-24-B	600W-25A Multiple Monitor Power Supply (24VDC)

### DIMENSIONS:

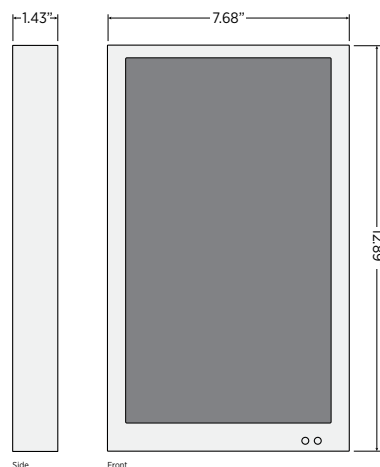

### CONNECTIONS:

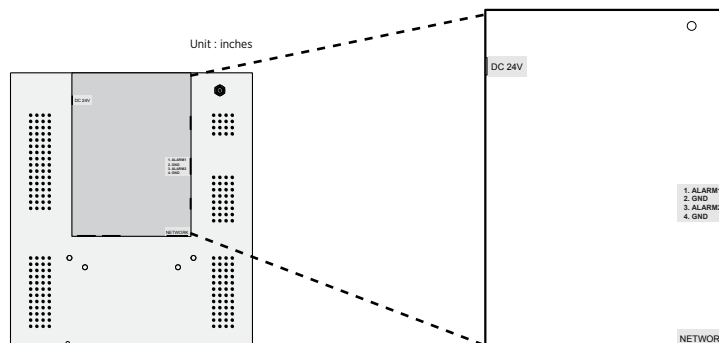

### CERTIFICATIONS:

