

## CE-EXSDI-T HD-SDI to EX-SDI Transmitter




### SPECIFICATIONS:

VIDEO IN	HD-SDI
VIDEO OUT	EX-SDI
MAX DISTANCE	800ft (RG59 Coaxial Cable • Full HD:1.5G)
POWER IN	DC12V / .5A
POWER CONSUMPTION	DC12V / 1.3W
OPERATING TEMPERATURE	32°F - 104°F / 0°C - 40°C
OPERATING HUMIDITY	0 - 80% RH (non-condensing)
WEIGHT	.09 lbs / 45g
DIMENSIONS W x H x D	3" (W) x .78" (H) x .78" (D) 76mm x 20mm x 20mm

### INFO:

- Install on HD-SDI camera side to transmit an EX-SDI signal
- Takes an HD-SDI input signal and converts it to an EX-SDI output signal
- Use in conjunction with an EX-SDI DVR or the CE-EXSDI-R receiver
- EX-SDI has a typical transmission distance of 800 feet
- DC12V (Power Supply Sold Separately)

### CONNECTION DIAGRAM:

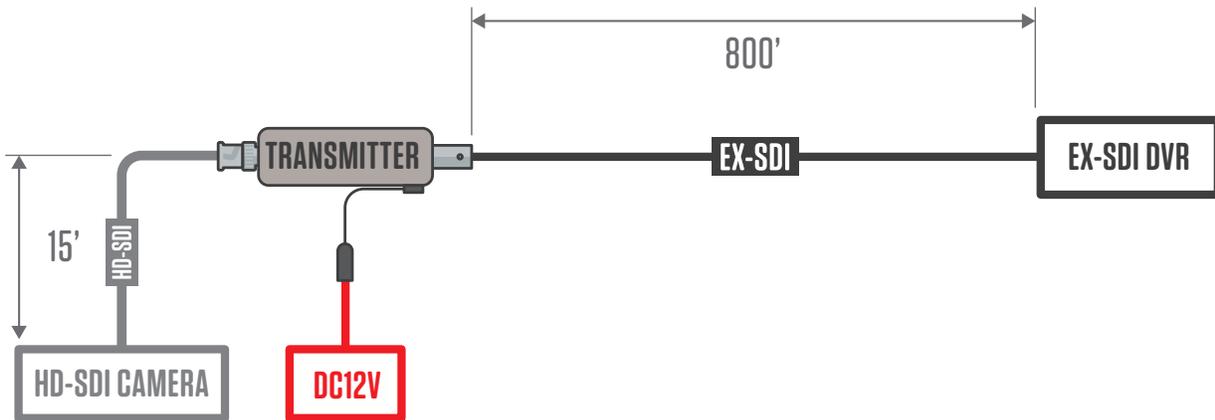

### For HD-SDI Camera to HD-SDI DVR:

The EX-SDI RECEIVER will not work with an HD-SDI camera. If using an HD-SDI camera, the EX-SDI TRANSMITTER is required in order for the RECEIVER to accept an EX-SDI video signal. EX-SDI TRANSMITTER sold separately. (CE-EXSDI-T)

