

CE-EX2HDMI

EX-SDI 2.0 to HDMI Converter




VIDEO INPUT	
Channels	1ch EX-SDI 2.0, EX-SDI, HD-SDI (BNC)
Resolution	Full HD 1920 x 1080p @ 30fps HD 1280 x 720p @ 30/60 fps
VIDEO OUTPUT	
Output	1ch HDMI (HDMI 1.3, DVI Compliant) 1ch Analog (BNC)
SDI Loop-Out	1ch EX-SDI 2.0, EX-SDI, HD-SDI (same as input signal)
HDMI Output Resolution *adjustable	Full HD 1080p @ 25 / 30 / 50 / 60fps Full HD 1080i @ 50 / 60fps HD 720p @ 50 / 60 fps
GENERAL	
Power Requirement	DC12V / 1A
Power Consumption	0.2A (200mA) ± 10%
Operating Temperature	32°F - 122°F / 0°C - 50°C
Operating Humidity	0-80% RH
Dimensions (L x W x H)	4.675" x 3.66" x 1.37" / 118.7mm x 93mm x 35mm
Weight	0.45 lbs / 0.2 kg

Key Features:

- Converts an EX-SDI 2.0 Signal into an HDMI signal
- 1ch EX-SDI 2.0 / EX-SDI / HD-SDI Input
- 1ch EX-SDI 2.0 / EX-SDI / HD-SDI Loop-Out (same as input signal)
- 1ch HDMI Output
- 1ch Analog Output
- Supports RS-485 (Half Duplex) Input
- Adjustable HDMI resolution & frame rate output
- DC12V (Power Supply Sold Separately)
- Mountable Aluminum Housing

Dimensions:

Unit : Inches

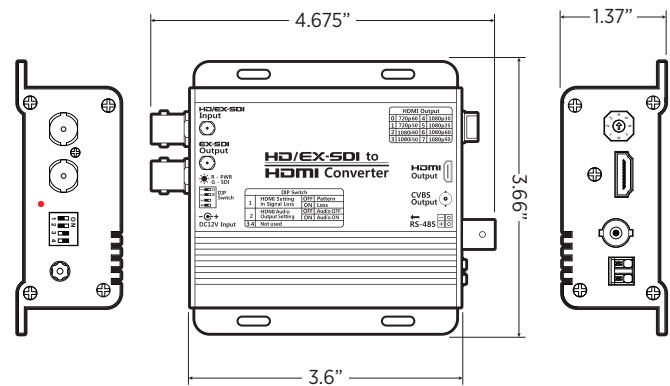

Connection Diagram (Example):

