


CE-VT550-HD 55" CCTV LCD Monitor



KEY FEATURES:

- 1920 x 1080 Resolution
- 16:9 Aspect Ratio
- 450 nit Brightness
- 4000:1 Contrast Ratio
- 1 EX-SDI 2.0 Input / 1 EX-SDI 2.0 Output
- 1 BNC Input / 1 BNC Output
- 1 VGA Input (VGA cable included - 4' 11")
- 1 HDMI Input (HDMI cable included - 6')
- 12VDC (1A) Output for powering external camera or other device
- Steel Bezel
- VESA 200, 200 x 300 & 200 x 400 (M6)
- Dual Voltage: 110-240 VAC or DC24V
- Remote Included
- Base Included

DIMENSIONS:

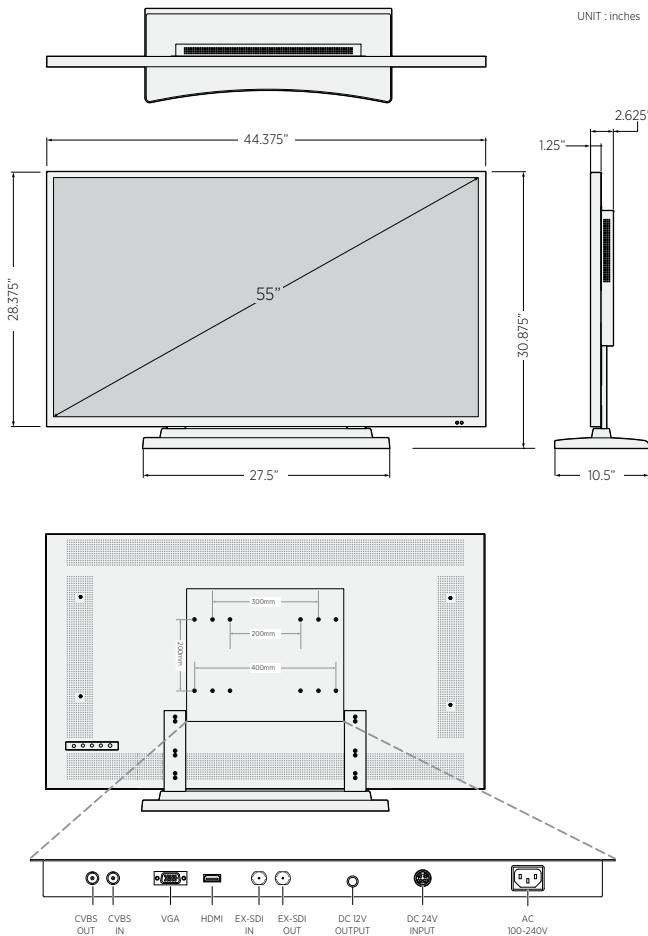

SPECIFICATIONS:

Display	55" WLED Backlight LCD (AMVA3)
Resolution	1920 x 1080
Control	OSD (On Screen Display) Control
Aspect Ratio	16:9
Display Colors	16.7M (8 BIT)
Brightness	450 nit
Contrast Ratio	4000:1
Viewing Angle	89° x 89° x 89° x 89°
Response Time	8ms
In / Out Impedance	75Ω /Auto Terminating Output
Mounting	VESA 200, 200 x 300 & 200 x 400 (M6) Stand Mount
Video Inputs	1 EX-SDI 2.0 / HD-SDI (Auto Detects) 1 Analog Input 1 VGA Input 1 HDMI Input
Video Outputs (Loop-through)	1 EX-SDI 2.0 / HD-SDI 1 Analog Output
Audio Inputs / Outputs	n/a
Power Output	12VDC (1A)
Power Requirement	100 - 240 VAC: 3A 24VDC: 4.25A
Power Consumption	100W max (24VDC)
Operating Temperature	32°F - 104°F / 0°C - 40°C
Dimensions (W x H x D) *on stand	48.875" x 30.875" x 10.5" 1241.43mm x 784.23mm x 266.7mm
Dimensions (W x H x D) *stand removed	48.875" x 28.375" x 2.5" 1241.43mm x 720.73mm x 63.5mm
Weight *on stand	56.10 lbs / 25.45kg
Weight *stand removed	50.35 lbs / 22.84kg

Recommended DC24V Power Supply

CE-S320-B	320W (12.5A) DC24V Monitor Power Supply
CE-600-24-B	600W (25A) DC24V Monitor Power Supply

CERTIFICATIONS:

